



Aircraft Tow Tractor



PT2690



Managed Maintenance Program:



in

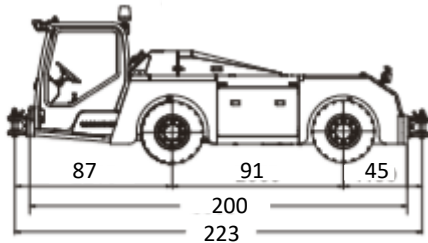

Features & Benefits

- Hydraulic 4 wheel steering
- Front and rear towing couplers
- Standard heated cab enclosure with front windshield and rear wiper kits
- Curtis controller with self-diagnosis function
- Vacuum assist hydraulic breaks
- Complete telematics for remote diagnostics real-time notification and pre/post start



■ Curtis CAN, LED controller with EMC and water-dust prevention.



■ Onboard telematics with compliance and access control.



Avro GSE
628 Henderson Drive, Regina
Saskatchewan, Canada, S4N 5X3

(306) 988-1678

avrogse.com

Aircraft Tow Tractor

SPECIFICATIONS

MODEL	PT2690
POWER TYPE	DIESEL
RATED TRACTION WEIGHT	250,000kg
SERVICE WEIGHT	16,500kg

DIMENSION PARAMETER

SIZE (LENGTH X WIDTH X HEIGHT)	223" (5660mm)/ 200" (5080mm) x 87" (2200mm) x 83" (2110mm)	
WHEELBASE	91" (2300mm)	
OVERHANG (F/R)	87" (2210mm)	45" (1150mm)
WHEEL TREAD (F/R)	74" (1870mm)	74" (1870mm)
TOWING COUPLERS HEIGHT (F/R)	17" (430mm)	17" (430mm)
GROUND CLEARANCE	9" (230mm)	
TURNING RADIUS	5000/3500mm	

PERFORMANCE PARAMETER

TRAVEL SPEED (NO LOAD)	23km/hr
FRONT AXLE LOAD	8250kg
REAR AXLE LOAD	8250kg
MAX DRAWBAR PULL	120kN

ENGINE

ENGINE MODEL	QSB4.5-C110
MANUFACTURER	CUMMINS
RATED OUTPUT (kW/r/min)	82/2200
RATED TORQUE (N – m/r/min)	488/1500
CYLINDERS	4
BORE x STROKE (mm)	107x124
FUEL CONSUMPTION (g/kW/h)	175

TRANSMISSION

MODEL	DANA T12000
STAGE (FWD/RVS)	4/3