
avro GSE
Best on Ground

# Belt Loader Lithium Electric

## BL30LI



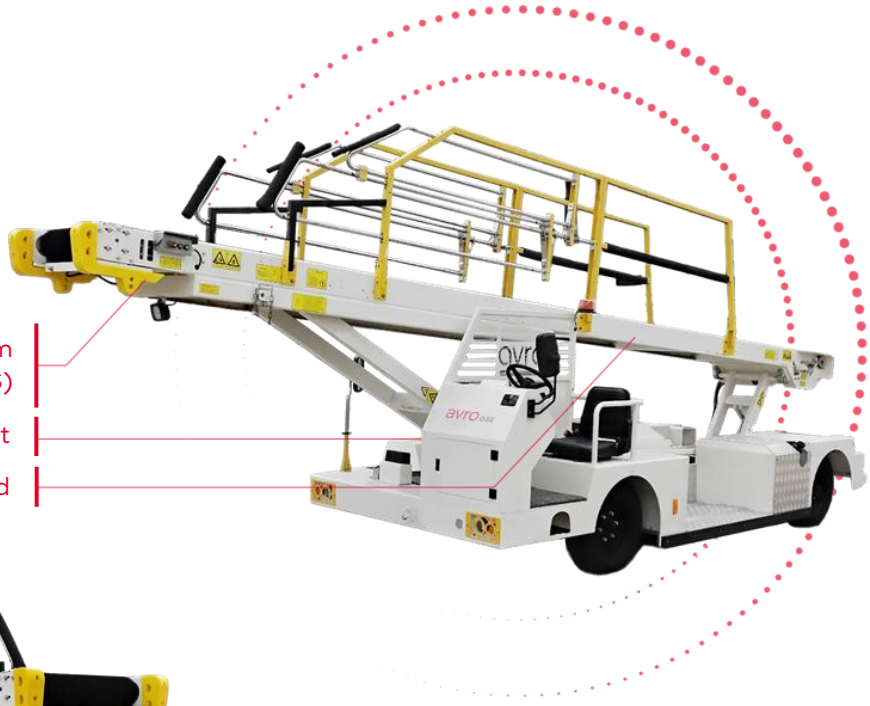


## Features & Benefits

- Hydraulic steering system
- Digital controller with self-diagnosis function
- Hydraulic braking system with redundancy
- Front & rear belt height adjustment with variable belt speed
- Safety interlocks
- Safety steps

## WHY AVRO

- 2 years / 2000 hours standard warranty
- Customized business relationship
- AAA maintenance program
- Stock locations across North America



avrogse.com
parts@avrogse.com
service@avrogse.com
+1 833 220 2810

# Belt Loader - Lithium Ion

BL30LI

| | |
|---|---|
| **Performance** | |
| MODEL | BL30LI |
| MAX SPEED FORWARD | 17mph (28km/h) |
| **Powertrain** | |
| POWER TYPE | Lithium Battery |
| OPERATING VOLTAGE | 80V |
| AH CAPACITY | 210AH |
| **Axle** | |
| CAPACITY - F/R | 5,300 / 6,600 (lb) |
| **Weight** | |
| SERVICE WEIGHT WITH BATTERY | 8,400lb (3,800kg) |
| **Main Dimensions** | |
| HEIGHT | 59" (1,500mm) |
| OVERALL LENGTH | 315" (8,000mm) |
| OVERALL WIDTH | 84" (2,120mm) |
| WHEEL BASE | 118" (3,000mm) |
| GROUND CLEARANCE | 6" (150mm) |
| TURNING RADIUS | 300" (7,600mm) |
| **Tire** | |
| TYPE | Pneumatic |
| FRONT | 225/70 R15 |
| REAR | 225/70 R15 |
| **Working Range** | |
| TRANSFER LENGTH | 301" (7,650mm) |
| TRANSFER WIDTH | 34" (870mm) |
| CONVEYOR BELT TRANSMISSION SPEED | 160 - 500mm/s |
| CONVEYOR BELT MAX TILT ANGLE | 29° |
| BELT RANGE | 50" (1,260mm) |
| TRANSFER MINIMUM HEIGHT (F/R) | 46"/35" (1,180mm/880mm) |
| **Optional** | |
| SINGLE/DUAL FRONT BUMPERS | |
| REAR BAR | |
| CRJ HANDRAIL | |
| EXTENDABLE HANDRAIL | |

